

DUAL PRESSURE CONTROLS

Type **DYS**

SAGInoMIYA

GENERAL DESCRIPTION

- Type DYS is dual pressure controls that is integrated with over pressure protection of the high pressure side and control of low pressure side of the refrigeration unit.
- Scale plate with significantly clear visibility
- Compact and light weight

CE mark applicable (available upon request)



SPECIFICATIONS

- Fluid temperature: -20 to 120°C
- Ambient temperature: -20 to 70°C

TYPE NUMBER SELECTION

Automatic reset type

Unit: MPa {kgf/cm²}

*1 Catalog No.	Pressure Side	Range		Differential		Factory Setting		Max. Working Pressure	Contact Function	Wt. (kg)
		Min.	Max.	*2 Min.	Max.	Off	On			
DYS-D306X0	Low Side	-0.06 {-50cmHg}	0.6 {6}	0.06 {0.6}	0.4 {4}	0.2 {2}	0.3 {3}	1.65 {16.5}	Diagram 1	0.40
	High Side	0.8 {8}	3 {30}	Approx.0.5 fixed. {Approx.5 fixed.}		2 {20}	1.5 {15}	3.3 {33}		
DYS-D606X0	Low Side	-0.06 {-50cmHg}	0.6 {6}	0.06 {0.6}	0.4 {4}	0.2 {2}	0.3 {3}	1.65 {16.5}	Diagram 3	
	High Side	0.8 {8}	3 {30}	Approx.0.5 fixed. {Approx.5 fixed.}		2 {20}	1.5 {15}	3.3 {33}		

Manual reset type

Unit: MPa {kgf/cm²}

*1 Catalog No.	Pressure Side	Range		Differential		Factory Setting		Max. Working Pressure	Contact Function	Wt. (kg)
		Min.	Max.	*2 Min.	Max.	Off	On			
DYS-D306X0M	Low Side	-0.06 {-50cmHg}	0.6 {6}	0.06 {0.6}	0.4 {4}	0.2 {2}	0.3 {3}	1.65 {16.5}	Diagram 2	0.40
	High Side	0.8 {8}	3 {30}	Automatic operation on pressure increase and manual reset on pressure decrease		2 {20}	manual reset	3.3 {33}		
DYS-D606X0M	Low Side	-0.06{-50cmHg}	0.6 {6}	0.06 {0.6}	0.4 {4}	0.2 {2}	0.3 {3}	1.65 {16.5}	Diagram 4	
	High Side	0.8 {8}	3 {30}	Automatic operation on pressure increase and manual reset on pressure decrease		2 {20}		3.3 {33}		
DYS-D606X0MM	Low Side	-0.06{-50cmHg}	0.6 {6}	Automatic operation on pressure decrease and manual reset on pressure increase		0.2 {2}	manual reset	1.65 {16.5}	Diagram 5	
	High Side	0.8 {8}	3 {30}	Automatic operation on pressure increase and manual reset on pressure decrease		2 {20}		3.3 {33}		



• Enclosure: IP20

*1 Standard unit display is MPa. Other unit displays are available upon request by changing "X0" portion of a catalog number.

[X0: MPa, X1: bar, X2: kgf/cm², X3: kPa, X4: lb/in², X5: psi]

*2 Indicates the average value also considering instrumental errors.

DIMENSIONS

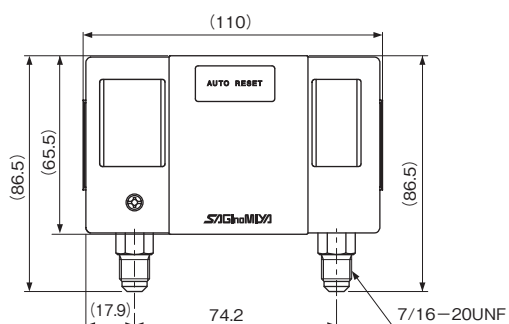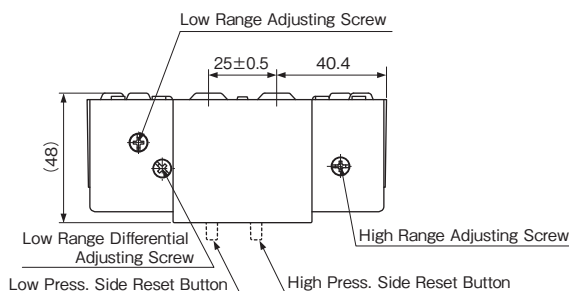

CONTACT FUNCTIONS

Refer to Pages 16

ELECTRICAL RATINGS

Rated Voltage (V)		Power Factor (cos φ)	125/250V. AC
Rated Current (A)			
Non-Inductive Current		1	12
Inductive Current	Full Load	0.75	72
	Inrush Current	—	

Minimum contact capacity: 50mA

Unit: mm